

VX-050DA

DIGITAL POWER AMPLIFIER MODULE 500W

The VX-050DA is an Digital power amplifier used for the VX-3000 systems which is compliant with the European Standard EN54 for fire alarm systems. It is a module type with 1 channel of class-D digital power amplifier, which contribute to energy-saving and light weight design. The VX-050DA also features standby mode to be set for reducing standby power consumption. It requires a dedicated control units VX-3004F, VX-3008F, VX-3016F and power supply unit VX-3000DS.



Order no: VX-050DA
Alternative products: VX-050DA


Specifications

| | |
|--------------------------|--|
| Power source | 31 V DC (operating range: 20 – 40 V DC) |
| Rated output | 500 W |
| Frequency response | 40 Hz - 16 kHz (± 3 dB) |
| Distortion | < 1 % |
| Distortion | < 1 % (at 100 V line, A-weighted) |
| Dimensions (W x H x D) | 79 x 91 x 358,2 mm |
| Dimensions (ϕ x D) | x 358,2 mm |
| Finish | Surface treated steel plate, white paint (RAL9016) |


VX-050DA

DIGITAL POWER AMPLIFIER MODULE 500W


Appearance



Rear View

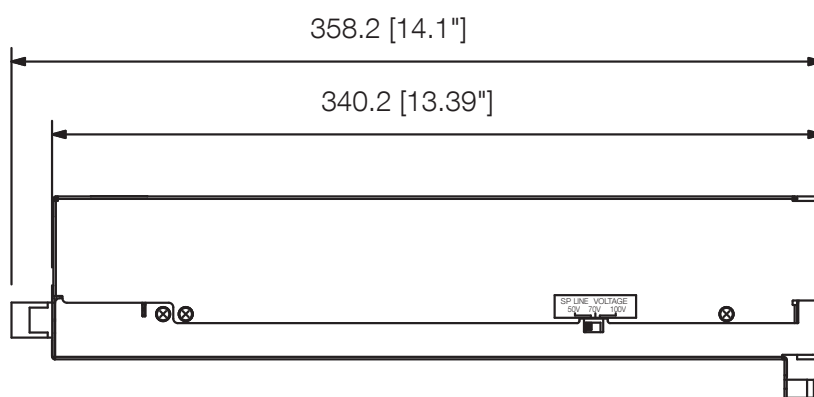

Side View

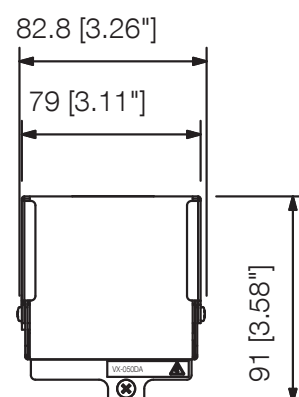

Front View

UNIT:mm

SCALE:1/4