

BS-680FC

WALL MOUNT SPEAKER 6W BS5839.

Constructed with metal cabinet, the speaker is ideal for use in a voice alarm system. Can be surface- or flush-mounted to the wall. Either concealed in-wall wiring or exposed wiring can be used for speaker cable connection. The speaker structure of direct wall-mounting with screws prevents the speaker from falling easily even if an outward force is applied to. The input impedance can be easily changed by changing the tap position of the transformer. The built-in 16 cm double cone speaker unit delivers high quality sound. Two steatite screw terminal blocks (1 cable to 1 connection type) make bridge connection easier.



Order no: BS-680FC
Alternative products: VX-3004F, VX-3008F,
VX-3016F, SX-2000SM, SX-2000AO,
SX-2100AO, VM-3360VA, VM-3240VA,
VM-3240E, VM-3360E, VX-2000, VP-3504,
VP-3154, VP-3304, VP-2421incl, VP-2421,
VP-2241, VP-2241incl, VP-2122incl, VP-2122,
VP-2064, VP-2064incl

**BS-680FC**

WALL MOUNT SPEAKER 6W BS5839.


Specifications

Frequency response	150 Hz - 20 kHz
Connection	Ceramic screw terminals, thermal fuse
Sensitivity (1#V, 1#m) (combined)	94 dB (> 94 dB (1 W, 1 m) (500 Hz – 5 kHz, pink noise) > 77 dB (1 W, 4 m) (100 Hz – 10 kHz, pink noise) according to EN 54-24 > 89 dB (1 W, 1 m) (100 Hz – 10 kHz, pink noise) converted based on EN 54-24)
Speaker component	6" double cone-type
Rated input	6 W
Tappings	6 / 3 / 1.5 / 0.8 W (100 V), 3 / 1.5 / 0.8 / 0.4 W (70 V)
Rated impedance	70 V, 100 V
Weight	2,6 kg
Certificates	EN 54-24, BS, Ease
Dimensions (W x H x D)	310 x 190 x 90 mm
Dimensions (ø x D)	x 90 mm
Gross weight	3,2 kg
Finish	Steel plate, paint, off-white (RAL 9010 or equivalent)

BS-680FC

WALL MOUNT SPEAKER 6W BS5839.

Appearance

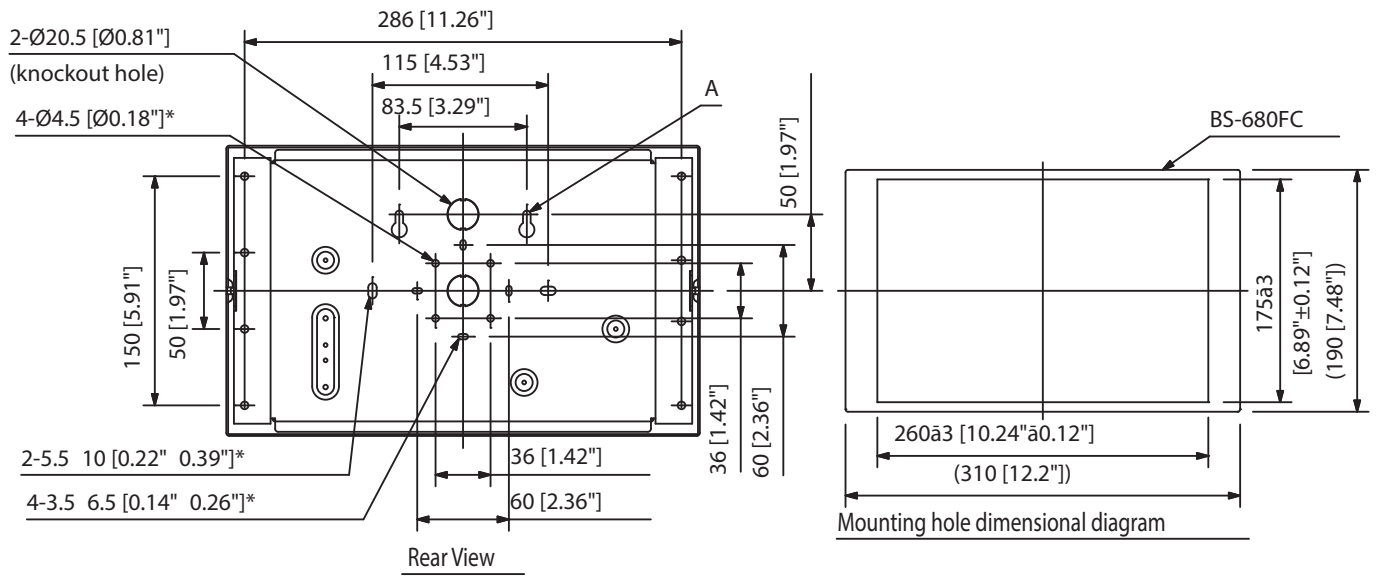

*Since no mounting screws are supplied with the speaker, separately prepare them appropriate for the construction of wall and its thickness.