


D-2000AD1

MIC/LINE INPUT MODULE

The D-2000AD1 is a 4-channel Microphone/Line Input Module designed for use with the D-2008SP Digital Mixing Processor Unit. It employs XLR type connectors.



Order no: D-2000AD1


Specifications

Frequency response	20 Hz - 20 kHz (± 1 dB (+4 dB Input))
Distortion	< 0.008 % (+4 dBV input)
Inputs	4 channels, Mic/Line changeable ; Mic: -50/-36 dBu, 4.7kOhm, Line: -10/+4 dBu, 10kOhm, electronically-balanced, Connector: XLR-3-31, Phantom power supply (48V DC), Ground lift switch
A/D, D/A Converter	24 bit
Sampling frequency	48 kHz
Gross weight	0,28 kg
Finish	Steel plate, pre-coated, 30% gloss,

D-2000AD1

MIC/LINE INPUT MODULE


Appearance

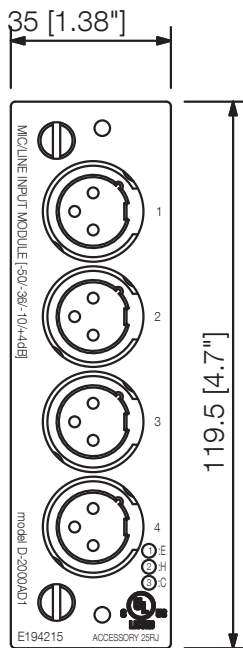

Front View



Top View

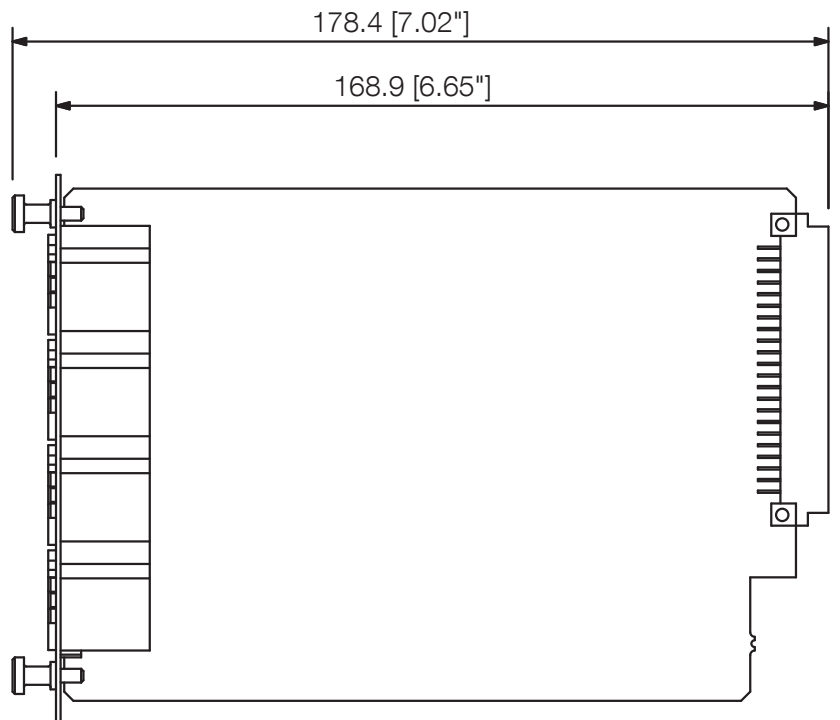

Side View

UNIT:mm

SCALE:1/2