


D-2000CB

COBRANET INTERFACE MODULE

The D-2000CB Cobranet Interface Module is designed for use with the D-2008SP Digital Mixing Processor Unit. When mounted to the D-2008SP, it allows audio transmission between this D-2008SP and other one. Each function is set by the dedicated setting software on a PC.



Order no: D-2000CB




Specifications

| | |
|------------------------|---|
| Inputs | 16 channels, 20 bit/24 bit |
| Outputs | 16 channels, 20 bit/24 bit |
| LAN | <p>CobraNet: 100BASE-TX, PRIMARY/SECONDARY 2 system, RJ45 connector, Enables decentralized installation, Audio transmission only</p> <p>Connection cable: Shielded twisted pair (STP) Cat 5 or higher LAN cable</p> <p>To be connected via the specified switching hub</p> <p>Note: This network should be completely independent of other LAN.</p> <p>Number of D-2008SP connection: Max. 4</p> <p>Switching hub stage: Max. 7</p> <p>Max extend distance: 100m (328.1 ft) (connected via a switching hub)</p> |
| Sampling frequency | 48 kHz |
| Weight | 100,0 g |
| Dimensions (W x H x D) | 17 x 80 x 140 mm |
| Dimensions (ø x D) | x 140 mm |
| Gross weight | 0,17 kg |
| Finish | Steel plate, pre-coated, |

D-2000CB

COBRANET INTERFACE MODULE

Appearance

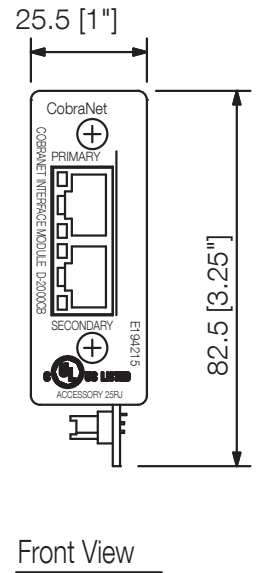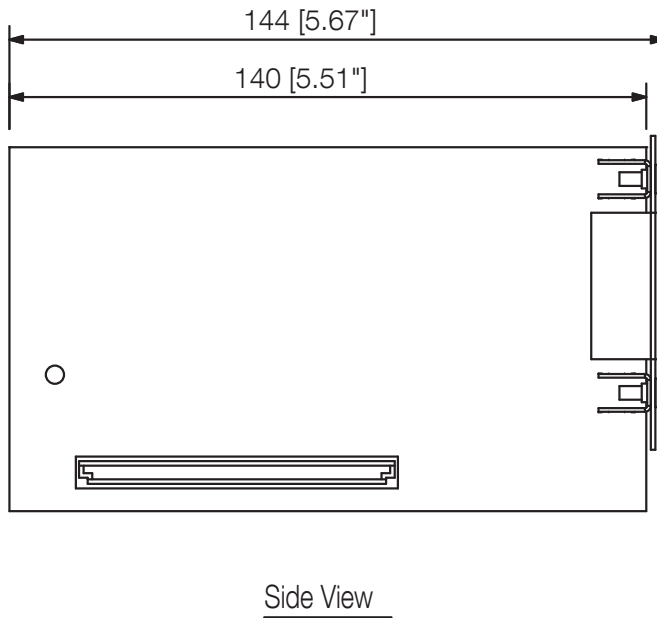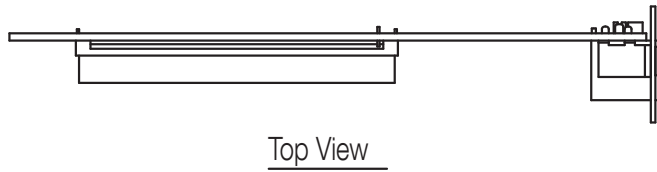

UNIT:mm

SCALE:1/2