


# D-922E

## MIC/LINE INPUT MODULE

The D-922E is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with removable terminal block type connectors. The D-901's 4-pole DIP switch is used to set the input sensitivity, phantom power supply, and ground lifting.

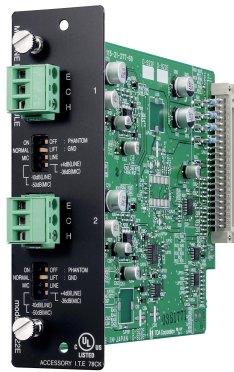

Order no: D-922E

### Specifications

Frequency response	20 Hz - 20 kHz ( $\pm 1$ dB (+4 dB Input))
Distortion	< 0,2 % (+4 dBV input)
Inputs	2 channels, -50/-36/-10/+4 dBu, (selectable with the DIP switch), 4.7kOhm, electronically-balanced, Connectors: removable terminal block (3 pins), Phantom power supply (12-15V DC), Ground lift switch
A/D, D/A Converter	20 bit
Sampling frequency	48 kHz
Weight	125,0 g
Dimensions (W x H x D)	35 x 119,5 x 178,4 mm
Dimensions ( $\phi$ x D)	x 178,4 mm
Gross weight	0,2 kg
Finish	Steel plate, pre-coated, 30% gloss, black


# D-922E

MIC/LINE INPUT MODULE


Appearance



Top View

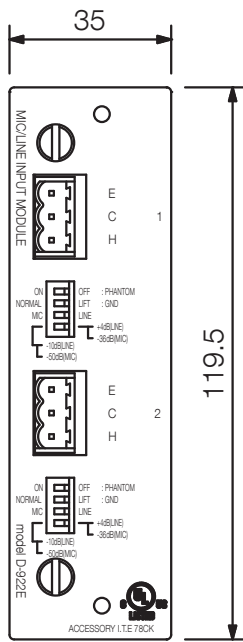

Front View

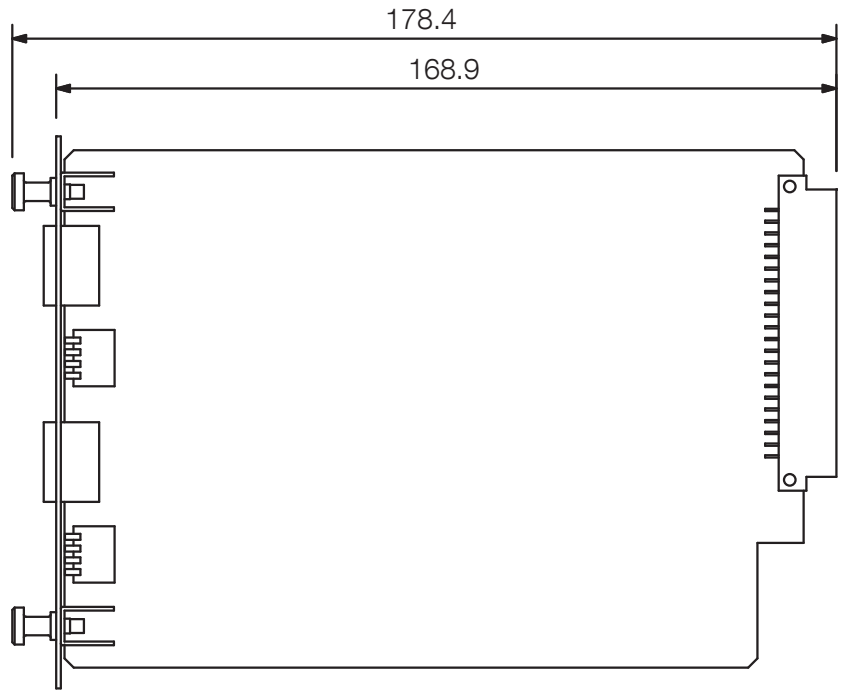

Side View

UNIT:mm

SCALE:1/2