

EC-380-EB

The stylish stand and slim gooseneck gives the EC-380-EB paging microphone with chime function an elegant look. Its stand is stable due to its reasonable weight and rubber feet. When depressing the talk button, the blue ring around the microphone is indicating that it is ready for broadcasting. The microphone can be powered by batteries or by phantom power from a pre-amplifier.




Order no: EC-380-EB

Specifications

Power source	Battery (6 VDC (4 x "AA" batteries) or DC power : 9 ~ 24V)
Frequency response	50 Hz - 18 kHz
Connection	3-pin XLR
Phantom power	9 - 52 V
Controls	Talk button
Directivity	Cardioid
Sensitivity	-41 dB (1 kHz, 0 dB = 1 V/Pa)
Weight	558,0 g
Dimensions (W x H x D)	110 x 484 x 145 mm
Dimensions (ø x D)	x 145 mm
Finish	ABS resin, paint, black
Operating temperature	0°C to 40°C

Appearance



CHIME MICROPHONE

EC-380-EB

DESCRIPTION


The EC-380-EB is a condenser microphone be equipped with a electrical chime and suitable use for paging applications. This product can be operated easily with four batteries or optional DC power source between 9 V to 24 V . The microphone's up and down 4 tones chime volume is adjustable.

SPECIFICATIONS

Power Source	6 VDC (4 X "AA" batteries) or DC power : 9 ~ 24 V
Current Consumption	13 mA when chime operate and 6 mA when microphone operate
Microphone element	Condenser microphone
Polar Pattern	Cardioid
Chime Tones	4-Tones Chime (UP / DOWN)
Impedance	600 Ω, Balanced
Sensitivity	Microphone : -41 dB ±3 dB (1 kHz 0 dB=1 V/Pa)
	Chime : -31 dB ±3 dB (maximum position)
Frequency Response Mic.	50 Hz ~ 18,000 Hz
Connector Output	XLR 3-32 Equivalent
	RJ45 : Audio Output, power supply and contact output
Operating Temperature	0 °C ~ +40 °C (32 °F ~ 104 °F)
Finish	Stand Mic : ABS Resin, Black, Paint
	Shaft : Copper alloy, Black, Paint
Dimensions	110 (W) x 145 (L) x 532 (H) mm (4.3" x 5.7" x 20.9")
Weight	558 g (exclude batteries)
Accessories	Windscreen..... 1, XLR Cable Stereo Phone Plug (7.5 m)..... 1

Note: Batteries and AC adapter are not supplied with the unit.
Please purchase separately.
Option adapter can use AD-246 AC adapter.

APPEARANCE

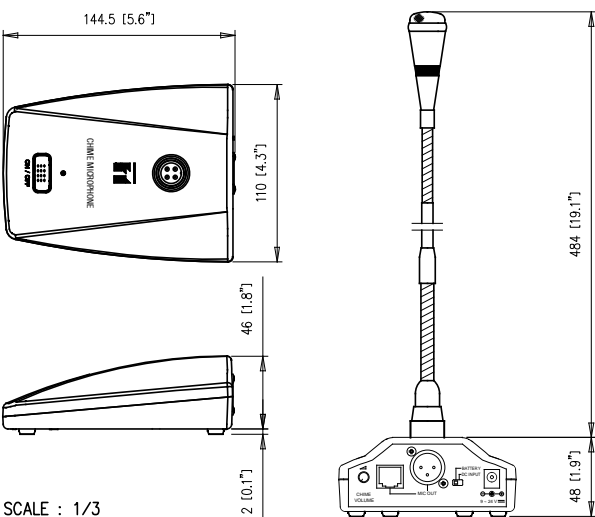

UNIT : mm [in] SCALE : 1/3

JUN./20/2019

TOA Corporation

DWG No: 506419019