

For repeated high-quality broadcasts and announcements  
 Easy to install and to use  
 Feed-in BGM e.g. from external CD player possible  
 Up to 4 separate messages can be stored and played back  
 Built-in USB Interface allows the upload of audio files and announcements from a PC  
 Announcements can be made by use of an external microphone  
 Control inputs and outputs  
 Speaker output  
 Monitor output




Order no: EV-20R W  
 Alternative products: A-1706, A-1712, A-1724


## Specifications

Power consumption	10 W (rated output)
Power source	Supplied from an external 24 V DC/400 mA power supply or from an optional AD-246 AC Adapter
Wave format	44.1 kHz sampling frequency, 16-bit PCM, WAV file (monaural)
Control input	Play 1 – 4, stop: No-voltage make contact input, pulse make length: 200 ms, open voltage: 30 V DC, short-circuit current: 10 mA, removable terminal block (22 pins)
Control output	Busy: Contact capacity: 30 V DC/0.5 A, removable terminal block (22 pins)
Input / Output	Input / Recording input: Mic: -60 dBV, 2.2 kΩ / Line: -20 dBV, 10 kΩ, (Mic/Line changeable), unbalanced, phone jack Line input: 0 dBV, 10 kΩ, unbalanced, removable terminal block (22 pins) Line output: 0 dBV, 600 Ω, unbalanced, removable terminal block (22 pins) / Headphone output: 0 dBV, 100 Ω, unbalanced, phonejack / Speaker output: 3 W, 8 Ω, removable terminal block (22 pins)
Distortion	< 1 %
Max. recording time	6 Min.
Weight	0,7 kg
Dimensions (W x H x D)	210 x 44,2 x 181 mm
Dimensions (ø x D)	x 181 mm
Gross weight	1,26 kg
Finish	ABS resin, black


Appearance

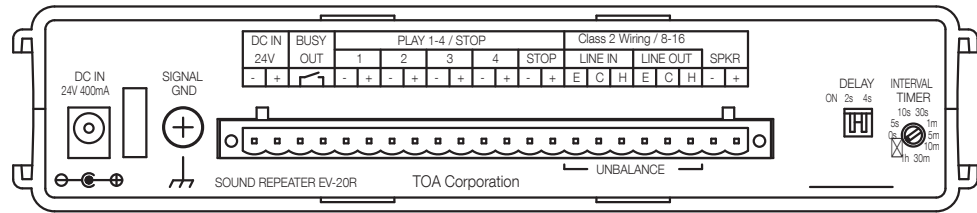

Rear View

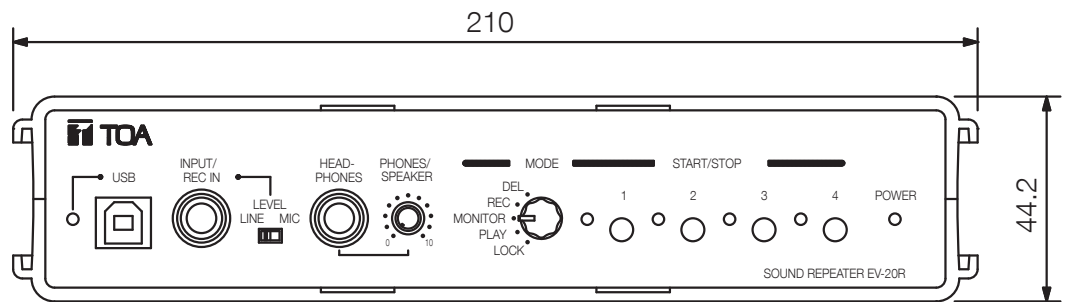

Front View

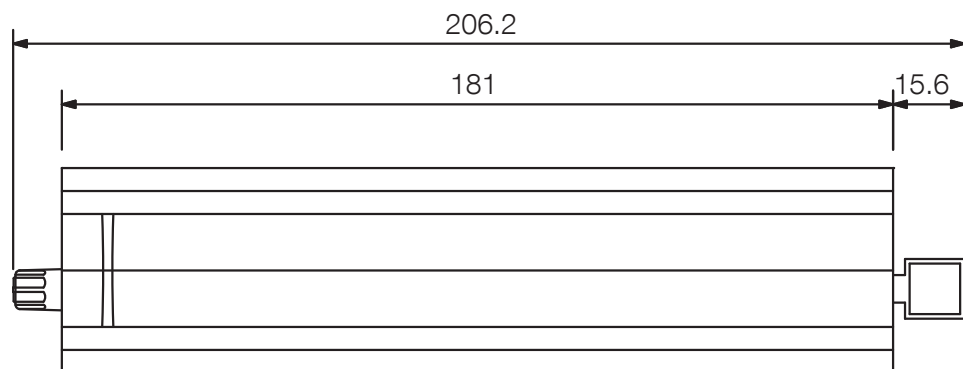

Side View

UNIT:mm

SCALE:1/2