




Order no: PE-604BU

Specifications

Frequency response	110 Hz - 20 kHz (-10 dB from sensitivity)
Sensitivity (1#W, 1#m) (combined)	90 dB (330 Hz – 3.3 kHz, pink noise)
Speaker component	12 cm cone-type + balanced-dome tweeter (coaxial)
Rated input	60 W
Tappings	100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W), 3.3kΩ (3W)70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 3.3kΩ (1.5W)25V line: 83Ω (7.5W), 170Ω (3.7W), 330Ω (1.9W), 70Ω (0.9W), 3.3kΩ (0.2W)Low impedance: 8Ω
Rated impedance	100 V, 70 V, 8 Ω
Dimensions (W x H x D)	x 275
Dimensions (ø x D)	186
Finish	HIPS resin, black (RAL 9011 or equivalent)

Appearance

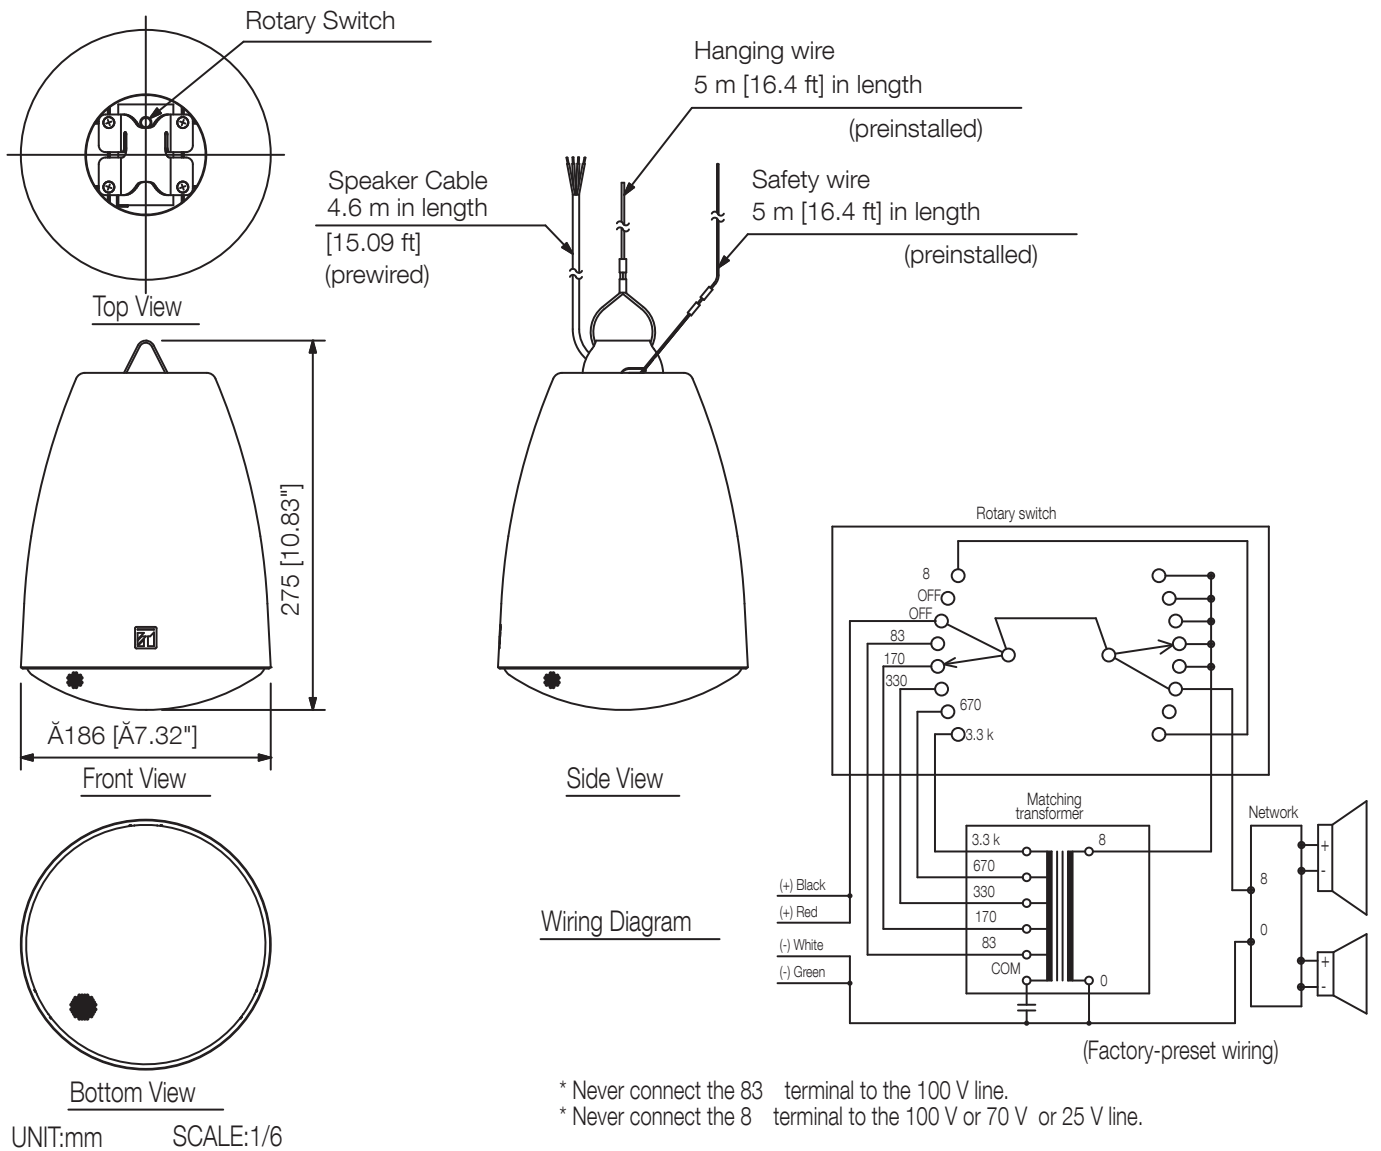

UNIT:mm SCALE:1/6