

TS-770

CENTRAL UNIT

The TS-770 is a Central unit for TOA Conference system, of which compact design makes it easy to install and store. Use of its line connection terminals permits connections to the conference units of TS-771, TS-772, and TS-775, making up a conference system. Up to 3 Central units can be connected.



Order no: TS-770 CE


Specifications

Power source	230 V AC, 50 / 60 Hz
Power consumption	Max. 60 W
Input / Output	Input: MIC: -60 dBV, 600 Ω, unbalanced, phone jack, AUX: -20 dBV, 10 kΩ, unbalanced, phone jack Output: Recording: -20 dBV, 10 kΩ, unbalanced, phone jack, pin jack × 2
Connection	MIC: -60 dBV, 600 Ω, unbalanced, phone jack AUX: -20 dBV, 10 kΩ, unbalanced, phone jack Recording: -20 dBV, 10 kΩ, unbalanced, phone jack, pin jack × 2 Expansion Input and Output Terminal: Input: -20 dBV, 10 kΩ, pin jack × 2 Output: -20 dBV, 10 kΩ, pin jack × 2 Control: 10 kΩ or more, voltage output, pin jack × 2
Dimensions (W x H x D)	210 x 107,1 x 316 mm
Dimensions (ø x D)	x 316 mm
Finish	Aluminium, hairline, black


Appearance

Rear View



CE version

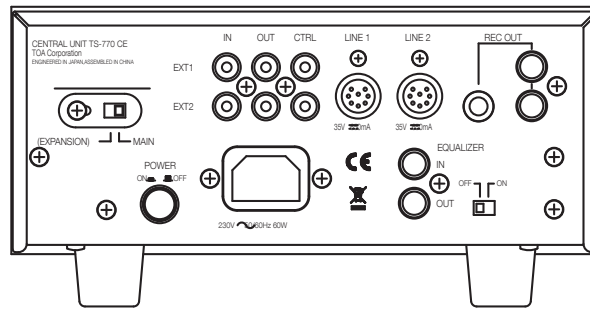



AC plug



CU version

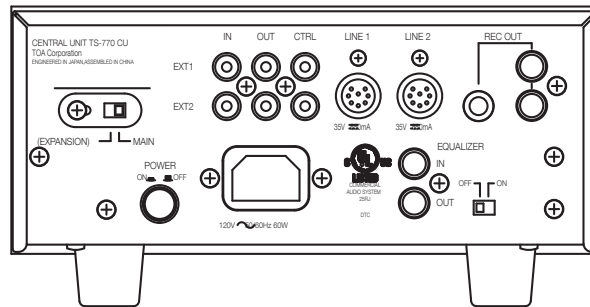

SA version

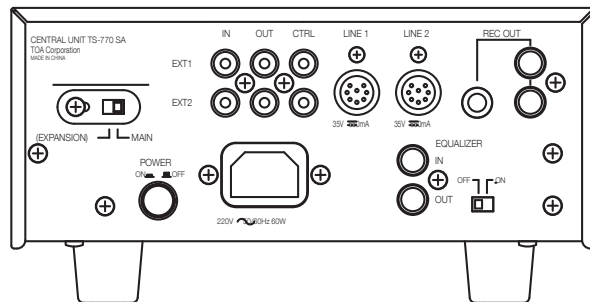

210 [8.27"]