

D-921F

MIC/LINE INPUT MODULE

The D-921F is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with XLR connectors. Input sensitivity and phantom power setting can be performed at the main frame such as the D-901.



Order no: D-921F

Specifications

Frequency response	20 Hz - 20 kHz (± 1 dB (+4 dB Input))
Distortion	< 0.05 % (+4 dBV input)
Inputs	2 channels, Mic/Line changeable ; Mic: -50/-36 dBu, 4.7kOhm, Line: -10/+4 dBu, 10kOhm, electronically-balanced ; Connectors: XLR-3-31, Phantom power supply (12-15V DC), Ground lift switch
A/D, D/A Converter	24 bit
Sampling frequency	48 kHz
Weight	150,0 g
Dimensions (W x H x D)	35 x 119,5 x 178,4 mm
Dimensions (ϕ x D)	x 178,4 mm
Gross weight	0,22 kg
Finish	Steel plate, pre-coated, 30% gloss, black


D-921F

MIC/LINE INPUT MODULE


Appearance



Top View

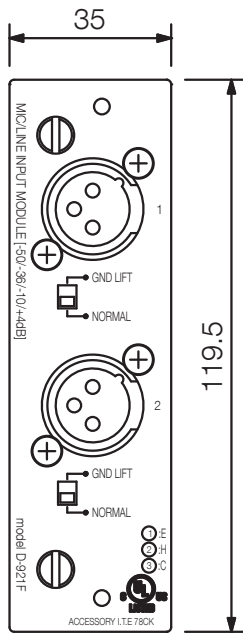

Front View

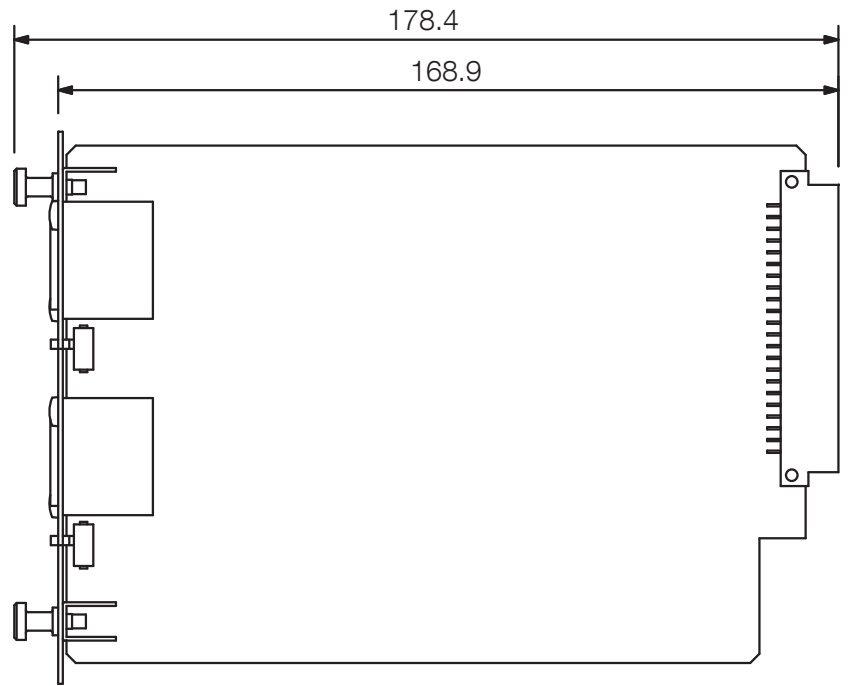

Side View

UNIT:mm

SCALE:1/2