


D-936R

STEREO SELECT INPUT MODULE

The D-936R is a 4 stereo input module designed for use with the D-901 Digital Mixer, etc. It is equipped with standard RCA pin jacks. The D-936R features two stereo transmission modes: 1) Selection of one of the four stereo inputs for transmission to the D-901. 2) Mixing of all four stereo inputs, transmitting the mixed signal to the D-901 through left/right channel outputs. Mode settings and stereo selection are performed at the main frame such as the D-901.

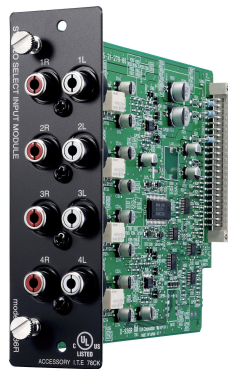

Order no: D-936R

Specifications

Frequency response	20 Hz - 20 kHz (± 1 dB (+4 dB Input))
Distortion	< 0.05 %
Inputs	4 stereo inputs (selection of 1 stereo or mixing or all 4 stereo inputs), -10 dBV, 10 kOhm, RCA pin jack
Sampling frequency	48 kHz
Weight	145,0 g
Dimensions (W x H x D)	35 x 119,5 x 178,4 mm
Dimensions (ϕ x D)	x 178,4 mm
Gross weight	0,22 kg
Finish	Steel plate, pre-coated, 30% gloss, black


D-936R

STEREO SELECT INPUT MODULE


Appearance



Top View

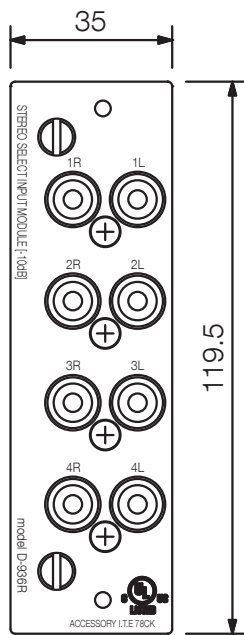

Front View

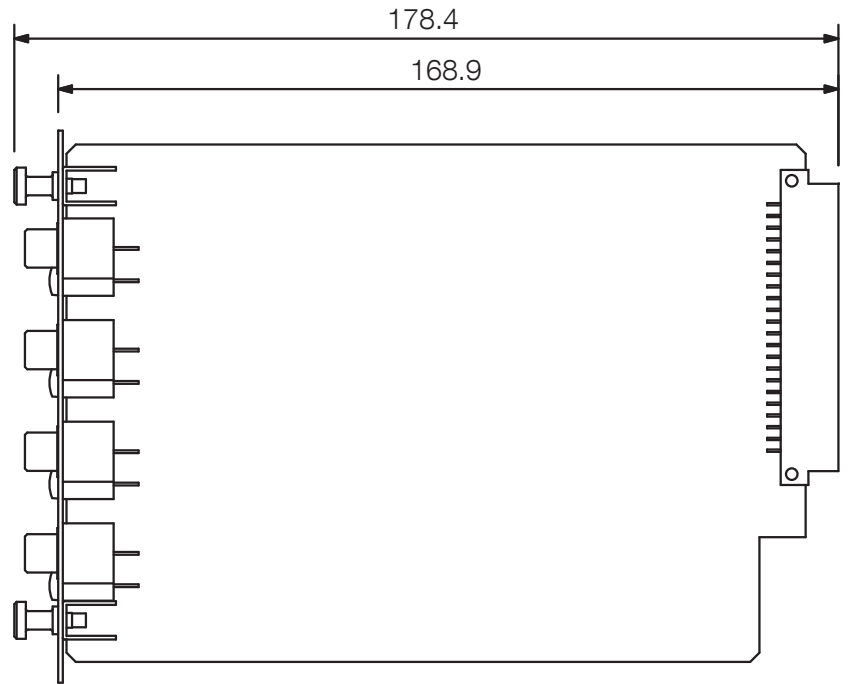

Side View

UNIT:mm

SCALE:1/2