

# HX-7B-WP

SPEAKER SYSTEM

The HX-7B-WP is a 2-way compact speaker system that permits both constant directivity control over a wide frequency range and changes in vertical directivity. Its adopted wave front control technology is ideal for reproducing clear sound in spaces with long reverberation times or high background noise. The speaker is designed to be installed under the eaves when used outdoors.



Order no: HX-7B-WP

## Specifications


Frequency response	105 Hz - 20 kHz
Connection	M4 screw terminal, distance between barriers: 9 mm (0.35")
Sensitivity (1#V, 1#m) (combined)	100 dB
Speaker component	Low frequency: 13 cm cone-type x 8; High frequency: Wave front control horn with compression driver x 4
Directivity angle horizontal	100 °
Rated input	250 W
Rated impedance	8 Ω
Crossover frequency	2 kHz
Power handling capacity	Continuous pink noise: 250 W (IEC60268-5: 350 W) / Continuous program: 750 W
Weight	30,0 kg
Certificates	IPX4, Ball-proof
Dimensions (W x H x D)	497 x 664 x 274 mm
Dimensions (ø x D)	x 274 mm
Gross weight	38 kg
Finish	Polypropylene resin, rust-proof coating, signal black(RAL 9004 or equivalent)
Operating humidity	90% at 40°C, 2 h
Operating temperature	-10°C ~ +50°C

# HX-7B-WP

SPEAKER SYSTEM


Appearance

(Factory-preset: 0° mode)

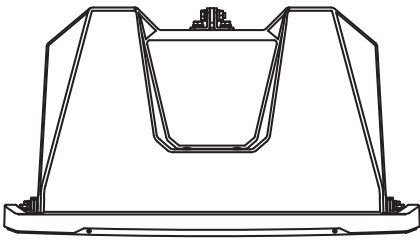

Top View


497 [19.57"]

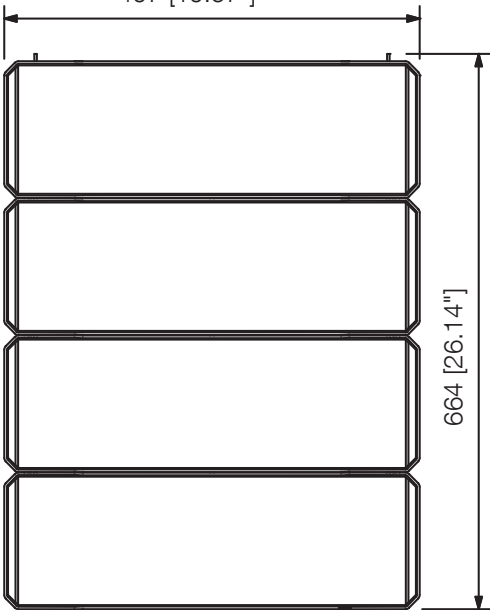


Front View

664 [26.14"]

274 [10.79"]

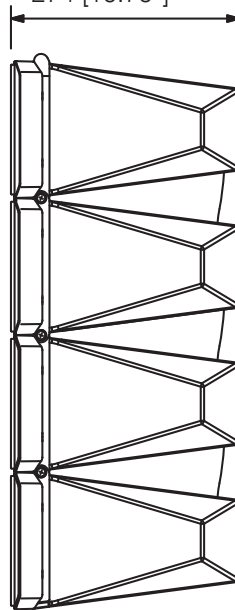

Side View

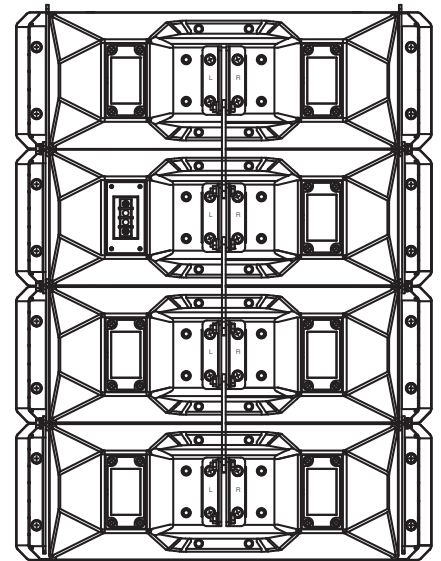

Rear View

UNIT:mm

SCALE:1/10