

# WTU-4800 G01

WIRELESS TUNER UNIT

The TOA Wireless Tuner Module WTU-4800 is a PLL-synthesizer controlled double superheterodyne diversity tuner module designed to be used in conjunction with UHF wireless equipment. It employs a compressor-expander system noise reduction circuit to minimize the influence of ambient RF noise.



Order no: WTU-4800 G01  
Alternative products: WT-4820 ER, ER-2930W


## Specifications

Power source	supplied from WT-4820 or ER-2930W
Power supply	7 – 12 V DC
Current consumption	100,0 mA
Diversity principle	Space diversity
Frequency response	100 Hz - 12 kHz
Receiving frequency	606 - 636 MHz
Antenna inputs	2, 75 Ω
Nominal output level	*UNDEFINED TEXT*
Audio output	AF OUT pin; unbalanced
Sensitivity	17 dBμV (limited by squelch)
Selectable frequencies (combined)	16
S/N ratio	80 dB (20 dBμV, 40 kHz deviation)
Dimensions (W x H x D)	60 x 25 x 139 mm
Dimensions (ø x D)	x 139 mm
Finish	Surface treated steel plate, white paint (RAL9016)
Operating temperature	-10°C to 50°C

# WTU-4800 G01

WIRELESS TUNER UNIT

Appearance

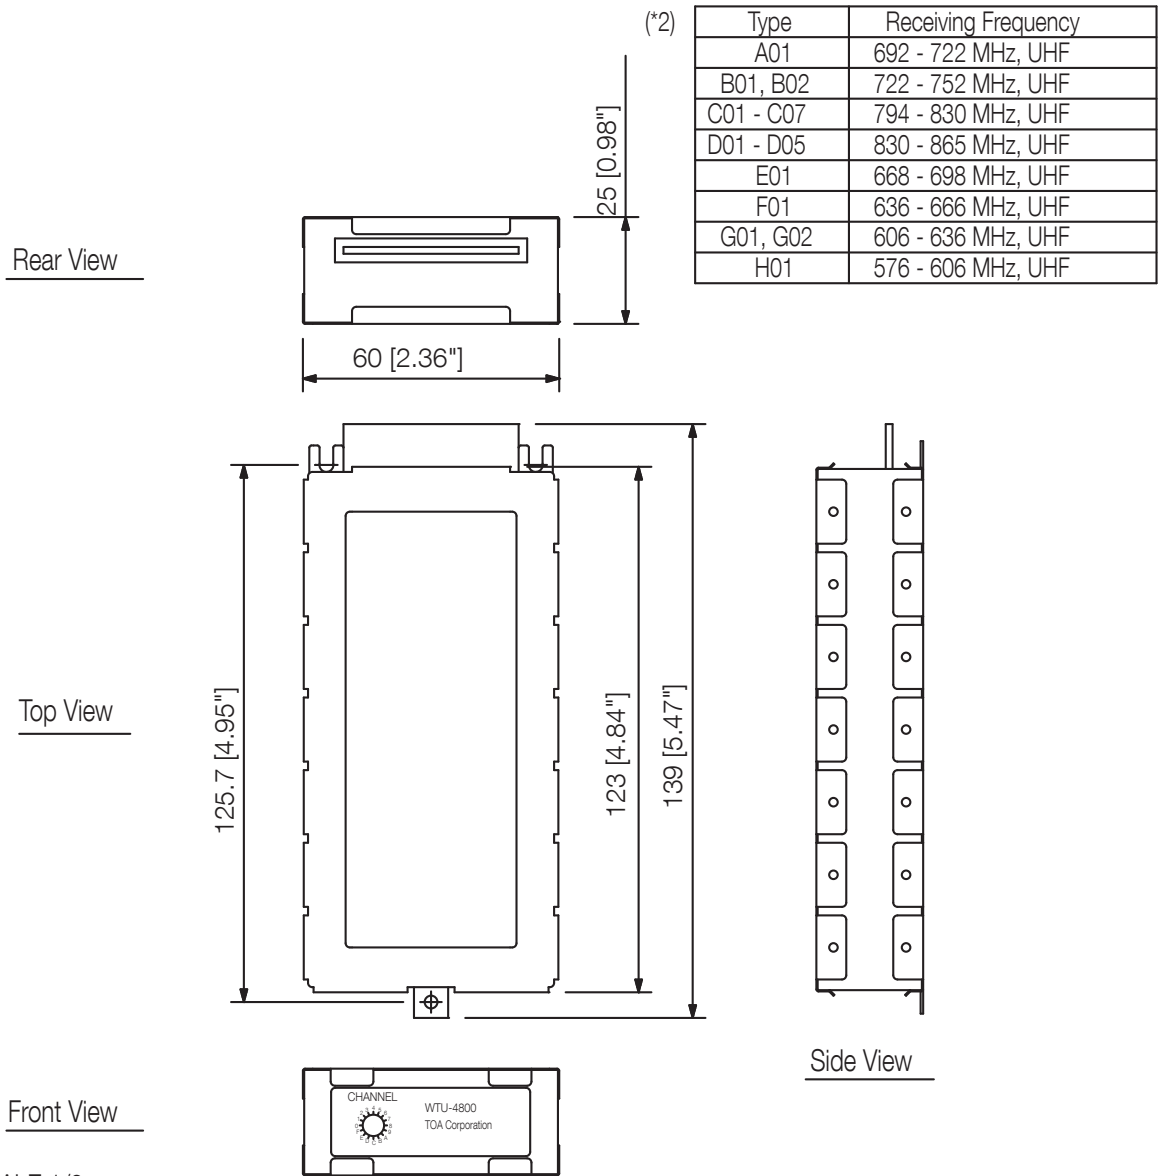

UNIT:mm

SCALE:1/2